



Electrical Panel

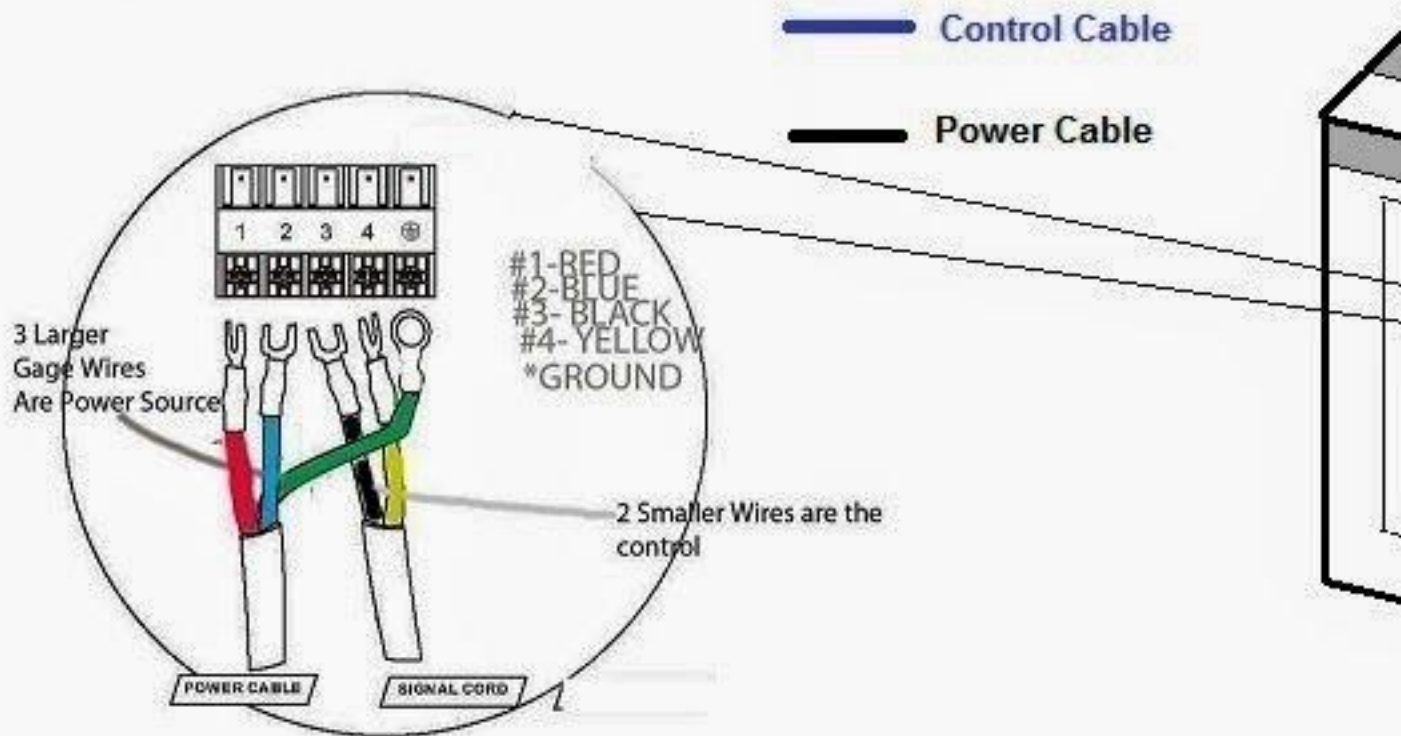

CLICK HERE FULL RESOLUTION

HOTLINK PROTECTION ACTIVATED - NOTE: Empty or Blank Referrals are

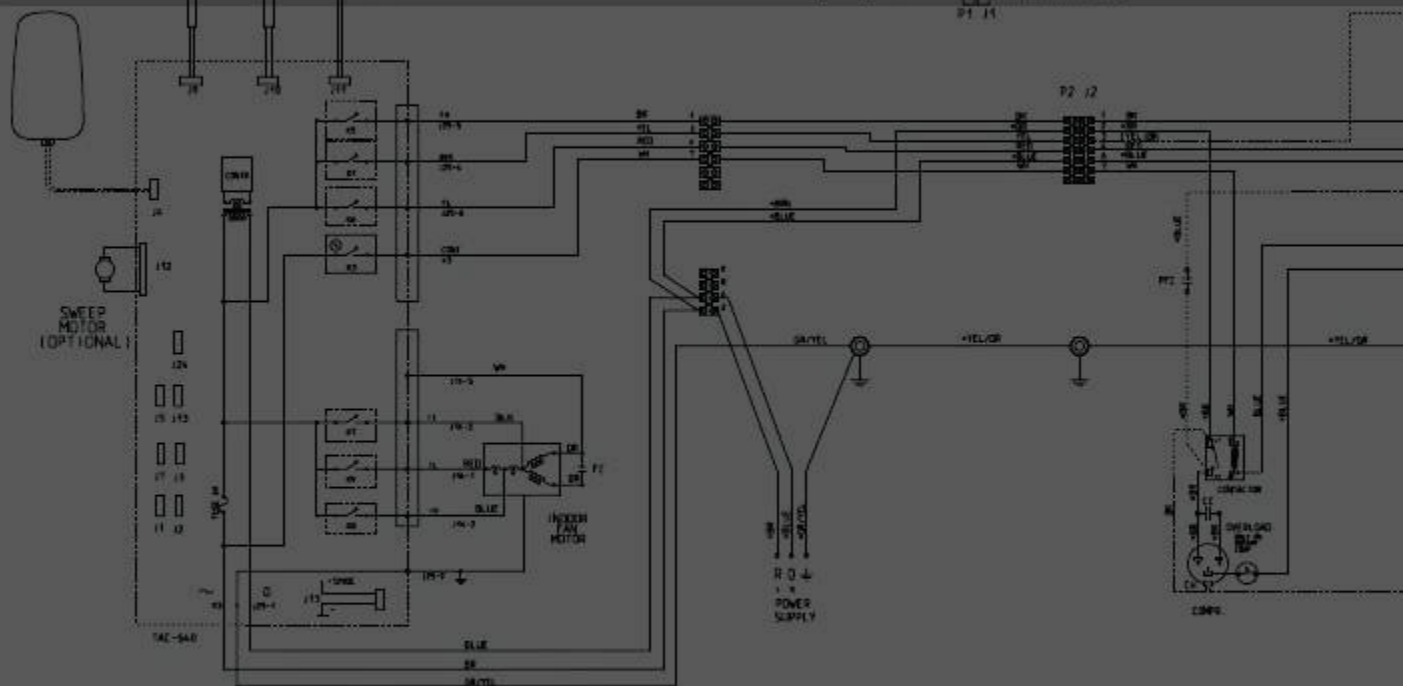

<http://ethiopiabunna.org>

51302525136-P 10W
Protected by: ByREV WP-PICShield - HOTLINK Defence

PFC - POWER FACTOR CORRECTOR
CH - COMMON
FL - FLOW
BVS - BATTERY VOLTAGE SENSE
+2.5 MV

Electric Wiring Work

INVERTER V



How?

- ❖ Do not use spliced wires or extension cord.
 - ❖ Inverter product → higher harmonic
- Therefore, be sure to install an earth leak detector.


Why?

Fire or electric shock may occur.
Product or earth leak detector malfunction.


Indoor & Outdoor Unit Wiring :

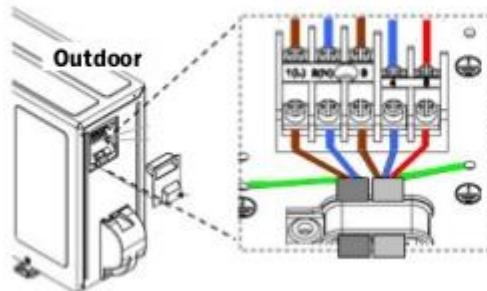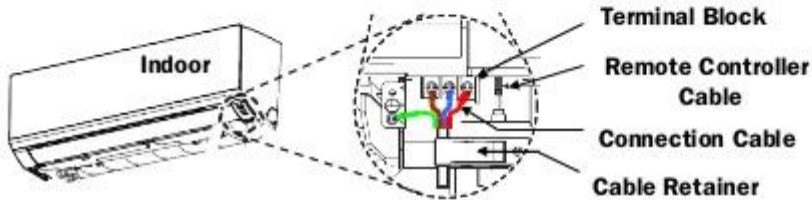


Note :




Use end-terminal for safety precautions



Excessive strip length
→ shock or leakage



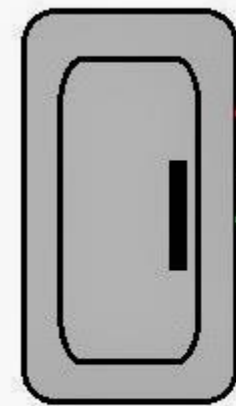

Electrical Panel

hot wire

neutral wire

ground wire

Outdoor
Disconnect means

Control Cable

Power Cable

